




> aWR1

- Competitiveness
- Good printing quality
- Receptor multi-compatibility

AWR®1 is the most competitive wax ribbon of the inkanto range.


AWR®1 is the ideal solution for applications particularly sensitive to the quality/price ratio.

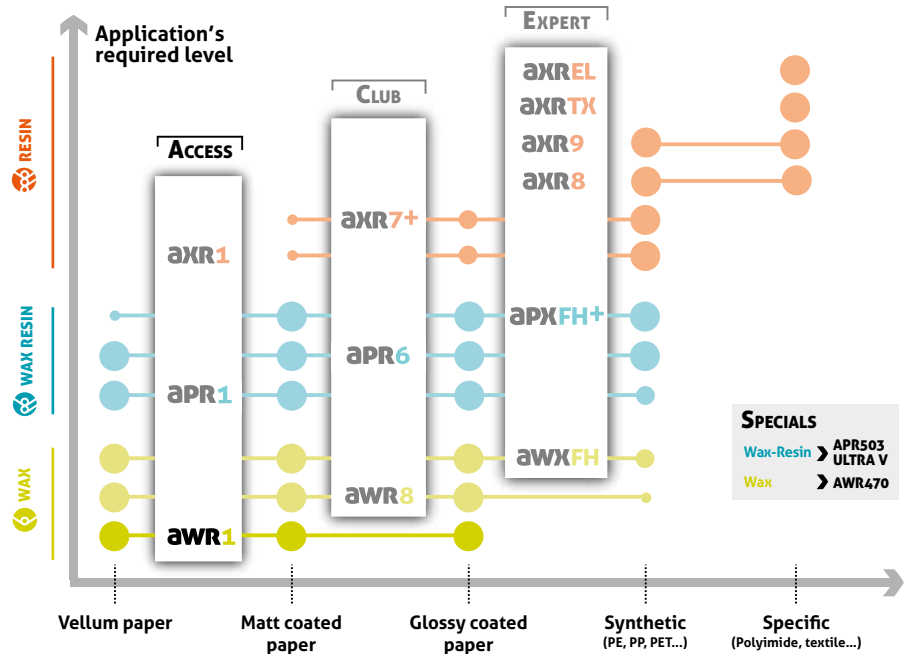


Printing receptor

papers	Wax	Wax-Resin	Resin
Vellum	●●●		
Coated	●●●	●●●	
Glossy coated	●●●	●●●	●●●

Printer settings

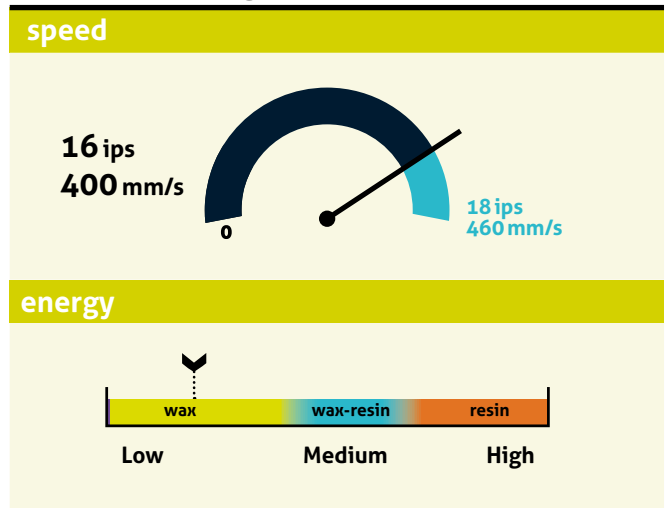

Print resistance

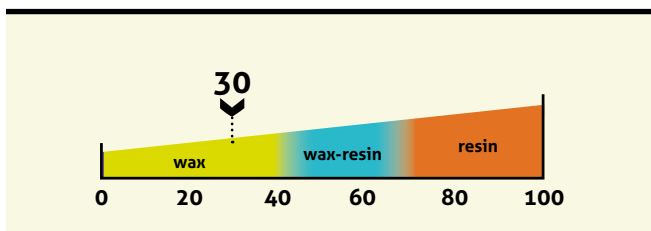

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ● ● ● ● ●

Length (m):

Width (mm):

Part number:


Your distributor:

Contact:



AWR1

Application fields

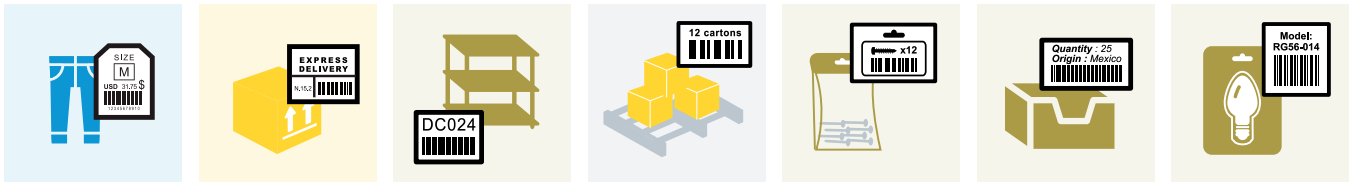

Product performance

print quality					
90°Barcode	60	A _a Small characters	80	Logos	95
0°Barcode	100	2D Barcode	100	Blackness	2,1 ODR*
technical resistances					
Heat	60°C 140°F / 300°C 572°F	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	30		

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax
Melting point	65°C/149°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.